

Fin color:



White Silver Black

Line Voltage

R-30 F

80 degree beam

120V / 220V / 277V line current

Medium Screw Base E26/E27, GU-24 Pin Base

50,000 hour rated life

Replaces:

75W Incandescent /
26W Compact Fluorescent

Par 30 LED Lamp

14 Watt typical (22W max)

Light Output

570-606 Lumen (useful)

Indoor/Outdoor

wet and dry locations

White (3) Color Temperatures:

- Warm** White (2700K)
- Neutral** White (3500K)
- Cool** White (4500K)

Operating:

Open Air Fixtures -4°F to 105°F
-20°C to 40°C

Dimmable with most commercial
and residential dimmers.

Weight: 9 oz.

Voltages: 120V (110V~130V),
220V (200V~250V),
277V

When used in a 5" or 6" recessed can a de-rated 10W light is required.
When used in a 4" recessed can a de-rated 8W light is required.

UL /CUL/CE /C-Tick rated



3-Year Warranty

Performance:

enLux RYgB LED Light for general illumination is powered by its proprietary, patented Solid State C.O.B. Light Engine coupled with its unique patented thermal management components providing high efficacy and maximum energy efficiency - 14 Watts typical.



The enLux R-30 Series LED Light aluminum housing is finished in a ultra durable top coat, will not shatter or break when dropped. Safe, cool to touch, 100% recyclable (no mercury or hazardous materials).





R30F Down Light Photometrics

0 ft	Illuminance					Distribution Ratio
3 ft	-	-	-	0.020	0.210	1.000
6 ft		0.005	0.019	0.053	0.138	0.250
9 ft	0.006	0.012	0.023	0.042	0.084	0.111
12 ft	0.008	0.013	0.022	0.035	0.054	0.063
15 ft	0.008	0.012	0.019	0.027	0.037	0.040
	15 ft	12 ft	9 ft	6 ft	3 ft	CL

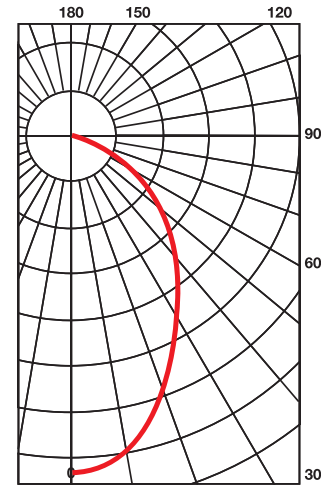

R30F Illuminance at Beam Centerline

White	CCT	P/N	Total Lumen	Throw Distance (feet)				
				3	6	9	12	15
Warm	2700°K	0011XX	570	320.0	80.0	35.6	20.0	12.8
Neutral	3500°K	0013XX	606	350.0	87.5	38.9	21.9	14.0
Cool	4500°K	0014XX	600	340.0	85.0	37.8	21.3	13.6

Unit in lux
1 lux = 0.0929 footcandle (fc)

R30F White E26/E27 Base / GU-24 Pin Base

Product Code	White Light CCT	Voltage	Fin Color
00 E26/E27	11 Warm (2700°K)	0 120V (110V~130V) Dimmable	0 White
03 GU-24	13 Neutral (3500°K)	2 220V(200V~250V) Dimmable	1 Black
	14 Cool (4500°K)	3 120V BR Dimmable	2 Silver*
		7 277V Dimmable	

*Special Order Only

Examples

001102	R30 Floodlight	E26/E27	Warm (2700°K)	120V	Silver Fin
001301	R30 Floodlight	E26/E27	Neutral (3500°K)	120V	Black Fin
001420	R30 Floodlight	E26/E27	Cool (4500°K)	220V	White Fin
031471	R30 Floodlight	GU-24	Cool (4500°K)	277V	Black Fin

