

Fin color:



White Silver Black

Line Voltage

R-20 F

80 degree beam



120V / 220V / 277V line current

Medium Screw Base E26/E27

50,000 hour rated life

Replaces:

45W Incandescent /
14W Compact Fluorescent

Par 20 LED Lamp

8 Watt typical

Light Output

450-490 Lumen (useful)

Indoor/Outdoor

wet and dry locations

White (4) Color Temperatures:

- Extra Warm** White (2600K)
- Warm** White (2700K)
- Neutral** White (3500K)
- Cool** White (4500K)

Operating:

Open Air Fixtures -4°F to 105°F
-20°C to 40°C

Weight: 5 oz.

Voltages: 100V, 120V, 220V, 240V, 277V When used in a 4" recessed can a de-rated 5W light is required.

CE /C-Tick rated




3-Year Warranty

Performance:

enLux RYgB LED Light for general illumination is powered by its proprietary, patented Solid State C.O.B. Light Engine coupled with its unique patented thermal management components providing high efficacy and maximum energy efficiency - 8 Watts typical.


*The enLux R-20 Series LED Light aluminum housing is finished in a ultra durable top coat, will not shatter or break when dropped. Safe, cool to touch, **100% recyclable** (no mercury or hazardous materials).*





R20F Floodlight Photometrics

0 ft	Illuminance Distribution Ratio					
3 ft	-	-	-	0.020	0.210	1.000
6 ft		0.005	0.019	0.053	0.138	0.250
9 ft	0.006	0.012	0.023	0.042	0.084	0.111
12 ft	0.008	0.013	0.022	0.035	0.054	0.063
15 ft	0.008	0.012	0.019	0.027	0.037	0.040
	15 ft	12 ft	9 ft	6 ft	3 ft	CL

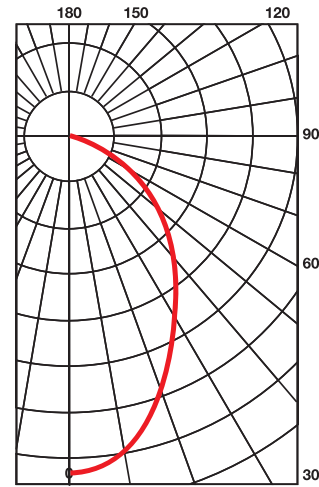

R20F Illuminance at Beam Centerline

White	CCT	P/N	Total Lumen	Throw Distance (feet)				
				3	6	9	12	15
Extra Warm	2600°K	0610XX	450	247.5	61.8	27.5	15.4	9.90
Warm	2700°K	0611XX	450	247.5	61.8	27.5	15.4	9.90
Neutral	3500°K	0613XX	460	253.0	63.3	28.1	15.8	10.10
Cool	4500°K	0614XX	490	269.5	67.3	29.9	16.8	10.78

Unit in lux
1 lux = 0.0929 footcandle (fc)

R20F White E26/E27 Base

Product Code	White Light CCT	Voltage	Fin Color
06 E26/E27	10 Extra Warm (2600°K)	0 120V	0 White
	11 Warm (2700°K)	1 100V	1 Black
	13 Neutral (3500°K)	2 220V	2 Silver*
	14 Cool (4500°K)	3 120V BR	
		4 240V	
		7 277V	

*Special Order Only

Examples

061102	R20 Floodlight	E26/E27	Warm (2700°K)	120V	Silver Fin
061301	R20 Floodlight	E26/E27	Neutral (3500°K)	120V	Black Fin
061420	R20 Floodlight	E26/E27	Cool (4500°K)	220V	White Fin

