

Fin color:



White Silver Black

**Line Voltage**

**R-30 F**

80 degree beam

120V / 220V / 277V line current

Medium Screw Base E26/E27

**50,000 hour rated life**

**Replaces:**

75W Incandescent /  
26W Compact Fluorescent

**Par 30 LED Lamp**

14 Watt typical

**Light Output**

700-750 Lumen (useful)

**Indoor/Outdoor**

wet and dry locations

**White (3) Color Temperatures:**

- Warm** White (2700K)
- Neutral** White (3500K)
- Cool** White (4500K)

**Operating:**

Open Air Fixtures -4°F to 105°F  
-20°C to 40°C

Weight: 9 oz.

Voltages: 120V (110V~130V),  
220V (200V~250V),  
277V

When used in a 5" or 6" recessed can a de-rated 10W light is required.  
When used in a 4" recessed can a de-rated 8W light is required.

CE /C-Tick rated



**3-Year Warranty**

**Performance:**

*enLux RYgB LED Light for general illumination is powered by its proprietary, patented Solid State C.O.B. Light Engine coupled with its unique patented thermal management components providing high efficacy and maximum energy efficiency - 14 Watts typical.*

*The enLux R-30 Series LED Light aluminum housing is finished in a ultra durable top coat, will not shatter or break when dropped. Safe, cool to touch, 100% recyclable (no mercury or hazardous materials).*







**R30F Down Light Photometrics**

0 ft Illuminance Distribution Ratio

3 ft	-	-	-	0.020	0.210	1.000
6 ft		0.005	0.019	0.053	0.138	0.250
9 ft	0.006	0.012	0.023	0.042	0.084	0.111
12 ft	0.008	0.013	0.022	0.035	0.054	0.063
15 ft	0.008	0.012	0.019	0.027	0.037	0.040
	15 ft	12 ft	9 ft	6 ft	3 ft	CL

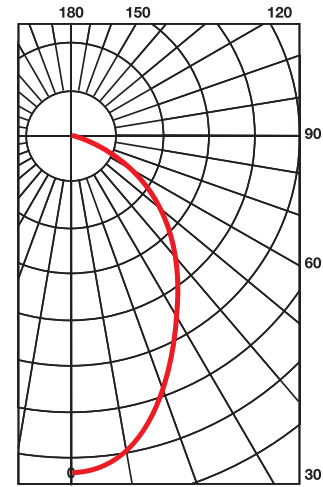

**R30F Illuminance at Beam Centerline**

White	CCT	P/N	Total Lumen	Throw Distance (feet)				
				3	6	9	12	15
Warm	2700°K	0011XX	700	385.0	96.3	42.8	24.1	15.4
Neutral	3500°K	0013XX	725	400.0	100.0	44.4	25.0	16.0
Cool	4500°K	0014XX	735	405.0	101.3	45.0	25.3	16.2

Unit in lux  
1 lux = 0.0929 footcandle (fc)

**R30F White E26/E27 Base**

Product Code	White Light CCT	Voltage	Fin Color
<b>00</b> E26/E27	<b>11</b> Warm (2700°K)	<b>0</b> 120V (110V~130V)	<b>0</b> White
	<b>13</b> Neutral (3500°K)	<b>2</b> 220V(200V~250V)	<b>1</b> Black
	<b>14</b> Cool (4500°K)	<b>3</b> 120V BR	<b>2</b> Silver*
		<b>7</b> 277V	

\*Special Order Only

**Examples**

<b>001102</b>	R30 Floodlight	<b>E26/E27</b>	Warm (2700°K)	120V	Silver Fin
<b>001301</b>	R30 Floodlight	<b>E26/E27</b>	Neutral (3500°K)	120V	Black Fin
<b>001420</b>	R30 Floodlight	<b>E26/E27</b>	Cool (4500°K)	220V	White Fin

