

Fin color:



Black White

Line Voltage

R-30 S

40 degree beam



120V / 220V / 277V line current

Medium Screw Base E26/E27, GU-24 Pin Base

50,000 hour rated life

Replaces:

75W Incandescent /
26W Compact Fluorescent

Par 30 LED Lamp

14 Watt typical (22W max)

Light Output

562-570 Lumen (useful)

Indoor/Outdoor

wet and dry locations

White (3) Color Temperatures:

- Warm** White (2700K)
- Neutral** White (3500K)
- Cool** White (4500K)

Operating:

Open Air Fixtures -4°F to 105°F
-20°C to 40°C

Dimmable with most commercial
and residential dimmers.

Weight: 12 oz.

Voltages: 120V (110V~130V),
220V (200V~250V),
277V

When used in a 5" or 6" recessed can a de-rated 10W light is required.
When used in a 4" recessed can a de-rated 8W light is required.

UL /CUL/CE /C-Tick rated




3-Year Warranty

Performance:

enLux RYgB LED Light for general illumination is powered by its proprietary, patented Solid State C.O.B. Light Engine coupled with its unique patented thermal management components providing high efficacy and maximum energy efficiency - 14 Watts typical.


The enLux R-30 Series LED Light aluminum housing is finished in a ultra durable top coat, will not shatter or break when dropped. Safe, cool to touch, 100% recyclable (no mercury or hazardous materials).





R30S Down Light Photometrics

0 ft	Illuminance					Distribution Ratio				
3 ft	-	-	-	-	0.015	1.000				
6 ft	-	-	-	0.004	0.090	0.250				
9 ft	-	-	0.002	0.008	0.084	0.111				
12 ft	-	0.001	0.003	0.023	0.055	0.063				
15 ft	0.001	0.001	0.019	0.024	0.038	0.040				
	15 ft	12 ft	9 ft	6 ft	3 ft	CL				

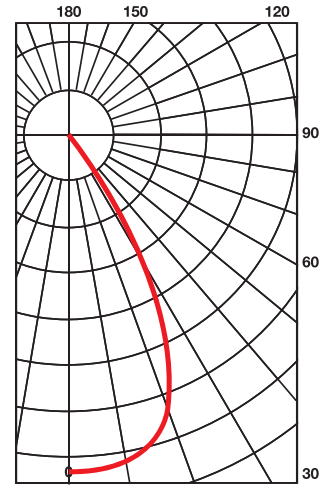

R30S Illuminance at Beam Centerline

White	CCT	P/N	Total Lumen	Throw Distance (feet)				
				3	6	9	12	15
Warm	2700°K	0111X1	562	800.0	200.0	88.9	50.0	32.0
Neutral	3500°K	0113X1	569	810.0	202.5	90.0	50.6	32.4
Cool	4500°K	0114X1	570	800.0	200.0	88.9	50.0	32.0

Unit in lux
1 lux = 0.0929 footcandle (fc)

R30S White E26/E27 Base / GU-24 Pin Base

Product Code	White Light CCT	Voltage	Fin Color
01 E26/E27	11 Warm (2700°K)	0 120V (110V~130V) Dimmable	0 White*
	13 Neutral (3500°K)	2 220V (200V~250V) Dimmable	1 Black
04 GU-24	14 Cool (4500°K)	3 120V BR Dimmable	2 Silver*
		7 277V Dimmable	

*Special Order Only

Examples

011101	R30 Spotlight	E26/E27	Warm (2700°K)	120V	Black Fin
011300	R30 Spotlight	E26/E27	Neutral (3500°K)	120V	White Fin
011422	R30 Spotlight	E26/E27	Cool (4500°K)	220V	Silver Fin
041171	R30 Spotlight	GU-24	Warm (2700°K)	277V	Black Fin

