

Fin color:



White

**Line Voltage**

**R-30 W**  
160 degree beam



120V / 220V / 277V line current

Medium Screw Base E26/E27, GU-24 Pin Base

**50,000 hour rated life**

**Replaces:**

100 - 200W Color Incandescent /  
26W Compact Fluorescent

**Par 30 LED Lamp**

14 Watt typical (22W max)

**Light Output**

- Red** - 365lm
- Green** - 610lm
- Blue** - 270lm
- Amber** - 285lm

**Indoor/Outdoor**

wet and dry locations

- Color:** **Red** 630nm
- Green** 535nm
- Blue** 465nm
- Amber** 589nm
- Custom** **CIE 1931**

**Operating:**

Open Air Fixtures -4°F to 105°F  
-20°C to 40°C

Dimmable with most commercial  
and residential dimmers.

Weight: 9 oz.

Voltages: 120V (110V~130V),  
220V (200V~250V),  
277V

When used in a 5" or 6" recessed can a de-rated 10W light is required.  
When used in a 4" recessed can a de-rated 8W light is required.

UL /CUL/CE /C-Tick rated



**3-Year Warranty**


**Performance:**

**enLux RYgB LED** Light for general illumination is powered by its proprietary, patented Solid State C.O.B. Light Engine coupled with its unique patented thermal management components providing high efficacy and maximum energy efficiency - 14 Watts typical. The **enLux R-30 Series LED** Light aluminum housing is finished in a ultra durable

top coat, will not shatter or break when dropped. Safe, cool to touch, 100% recyclable (no mercury or hazardous materials)\*\*. **enLux RGB LED Color** Light emits Twice-the-Light as a 100 Watt color filtered incandescent accent floodlight - using only 14 Watts typical.


\*\* California Title 22 compliant





R30W Down Light Photometrics

0 ft	Illuminance					Distribution Ratio
3 ft	0.002	0.008	0.024	0.088	0.370	1.000
6 ft	0.012	0.022	0.045	0.093	0.176	0.250
9 ft	0.015	0.026	0.041	0.064	0.093	0.111
12 ft	0.016	0.023	0.032	0.044	0.056	0.063
15 ft	0.015	0.020	0.025	0.031	0.038	0.040
	15 ft	12 ft	9 ft	6 ft	3 ft	CL

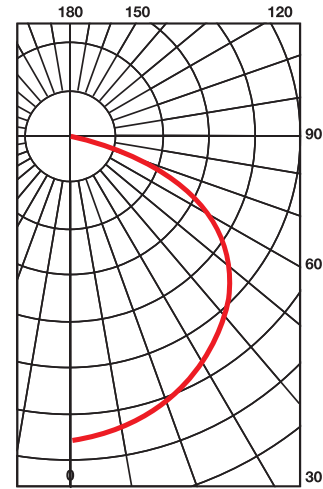

R30W Illuminance at Beam Centerline

Color	Wavelength	P/N	Total Lumen	Throw Distance (feet)				
				3	6	9	12	15
Red	620 nm	0216X0	540	269.0	67.2	29.9	16.8	10.8
Amber	589 nm	0217X0	300	113.6	28.4	12.6	7.1	4.5
Green	535 nm	0218X0	680	244.6	61.1	27.2	15.3	9.8
Blue	465 nm	0219X0	405	201.7	50.4	22.4	12.6	8.1

Unit in lux  
1 lux = 0.0929 footcandle

R30W Color E26/E27 Base / GU-24 Pin Base

Product Code	Color Light	Voltage	Fin Color
<b>Standard color</b>			
02 E26/E27	16 Red (630nm)	0 120V (110V~130V) Dimmable	0 White
	17 Amber (589nm)	2 220V (200V~250V) Dimmable	
	18 Green (535nm)	3 120V BR Dimmable	
05 GU-24	19 Blue (465nm)	7 277V Dimmable	
	<b>Custom color</b>		
02 E26/E27	20 415nm	0 120V (110V~130V) Dimmable	0 White
	23 Vita Yellow	2 220V (200V~250V) Dimmable	
	24 2050°K	3 120V BR Dimmable	
	27 630/415nm	7 277V	
05 GU-24	28 Margaritas Pink		
	30 Restaurant Pink		
	31 Pink Magenta		
	34 Deep Purple		
	36 Congo Blue		
	37 Happy Blue		
	38 True Blue		
	39 Green Blue		

Examples

023120	R30 Wide Floodlight	E26/E27	Pink Magenta	220V	White Fin
021600	R30 Wide Floodlight	E26/E27	Red (630nm)	120V	White Fin
053470	R30 Wide Floodlight	GU-24	Deep Purple	277V	White Fin

